




US Army Corps of Engineers®
 ENGINEERING AND SUPPORT CENTER
 HUNTSVILLE, AL

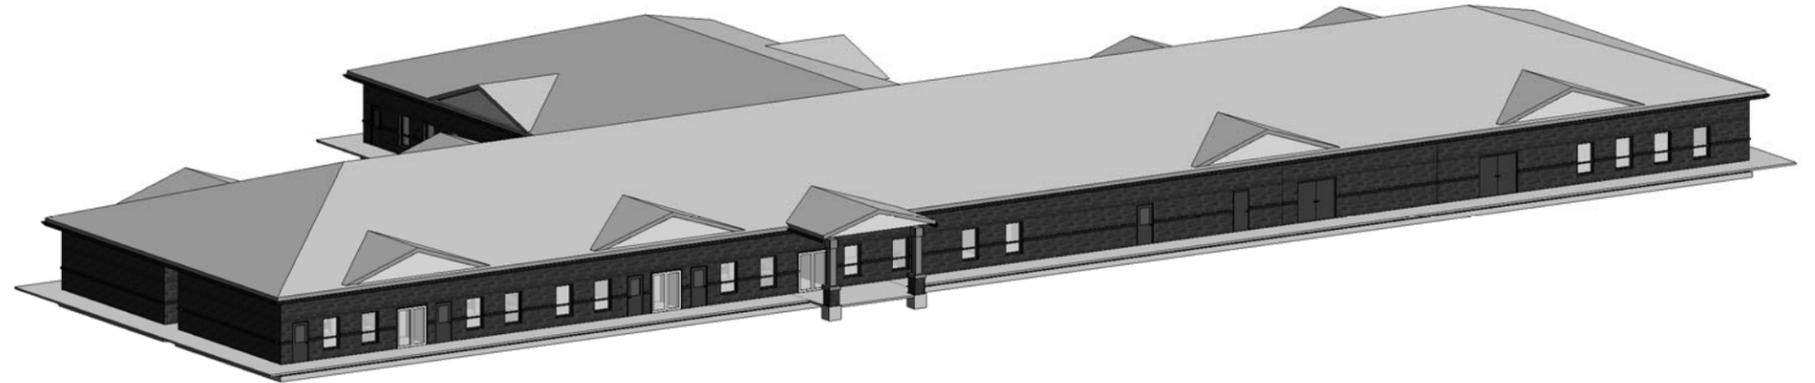

CHILD DEVELOPMENT CENTER (CDC) STANDARD DESIGN, MEDIUM 6 WEEKS - 5 YEARS OLD

CENTER OF STANDARDIZATION

LOCATION:

CONTRACT NUMBER : N/A

SOLICITATION NUMBER : N/A

PREPARED: JUNE 2014

STATUS: 65% ENERGY CONSERVATION
 DESIGN PACKAGE

*ENERGY CONSERVATION MEASURES AND LEED/SUSTAINABLE DESIGN FEATURES
 HAVE BEEN CONSIDERED FOR THIS PROJECT.

ANTICIPATE LEED: 56 CREDIT POINTS.

U.S. ARMY CORPS OF ENGINEERS ENGINEERING AND SUPPORT CENTER, HUNTSVILLE			
DISCIPLINES	DESIGNERS	REVIEWERS	SUPERVISORS
STRUCTURAL	JEFF HOKI/ MOLLY RICHARDSON	JOSH UMPHREY	JEFF COULSTON
ARCHITECTURAL	MARILYN SCOTT	TBD	TODD DUVERNAY
MECHANICAL PLUMBING FIRE PROTECTION	JOHN STEVENS PATRICK LANE	TBD	ROD BRIDGEMAN
ELECTRICAL TELECOMMUNICATIONS SECURITY	WYKESHIA CLARK	TBD	JEFF ZYSK

APPROVALS	SIGNATURES
BCOE BY	
REVIEWED BY (DIVISION CHIEF-MECH/ELEC)	
REVIEWED BY (DIVISION CHIEF-CIVIL/STRUC)	
RECOMMENDED BY (DIR OF ENGINEERING)	
APPROVED BY (COMMANDER)	

THIS PROJECT WAS DESIGNED BY THE U.S. ARMY ENGINEERING AND SUPPORT CENTER, HUNTSVILLE, OF THE U.S. ARMY CORPS OF ENGINEERS. THE INITIALS OR SIGNATURES AND REGISTRATIONS OF INDIVIDUALS APPEAR ON THESE DOCUMENTS WITHIN THE SCOPE OF THEIR EMPLOYMENT AS REQUIRED BY ER 1110-1-8152 AND CEHNC 1110-1-1.

5

4

3

2

1

NOTES

- 1. SEE GENERAL NOTES ON S-101.
- 2. ROOF SYSTEM IS NOTIONAL AND FINAL DESIGN FOR THE SPECIFIC SITE LOCATIONS IS BY OTHERS. THE ROOF SYSTEM STRUCTURAL LOAD PATH SHALL BE COORDINATED WITH THE WALL AND FOUNDATION SYSTEMS.
- 3. HEADERS LOCATED AT INTERIOR LOAD BEARING WALLS WHERE DOORWAYS AND HALLWAYS CAUSE DISCONTINUITIES IN WALL.
- 4. DOUBLE STUDS UNDER TRUSSES (INTERIOR AND EXTERIOR WALLS PERPENDICULAR TO ROOF TRUSSES)
- 5. SHEAR WALL PANELS ARE DIAGONALLY HATCHED. THE WALLS WERE SELECTED BASED ON THREE FACTORS: LENGTH, THICKNESS, AND MINIMUM OPENING



SYMBOL	DESCRIPTION	DATE	BY


DESIGN BY: JAH	DATE: SEPTEMBER 2013	DESIGNED BY: JAH	DATE: SEPTEMBER 2013
DRAWN BY: JWC	PROJECT NO.:	CHECKED BY: JWC	CONTRACT NO.:
SCALE: 3/32" = 1'-0"	FILE NAME:	DATE PLOTTED: 6/20/14 8:18:24 AM	CATEGORY CODE:
SIZE: 27" x 34"			

U.S. ARMY CORPS OF ENGINEERS
ENGINEERING AND SUPPORT CENTER
4820 UNIVERSITY SQ
HUNTSVILLE, AL 35816


CHILD DEVELOPMENT CENTER (CDC)
STANDARD DESIGN, MEDIUM
6 WEEKS - 5 YEARS OLD

ROOF FRAMING PLAN


PLATE REFERENCE NUMBER
S-102
SHEET 7 OF 87

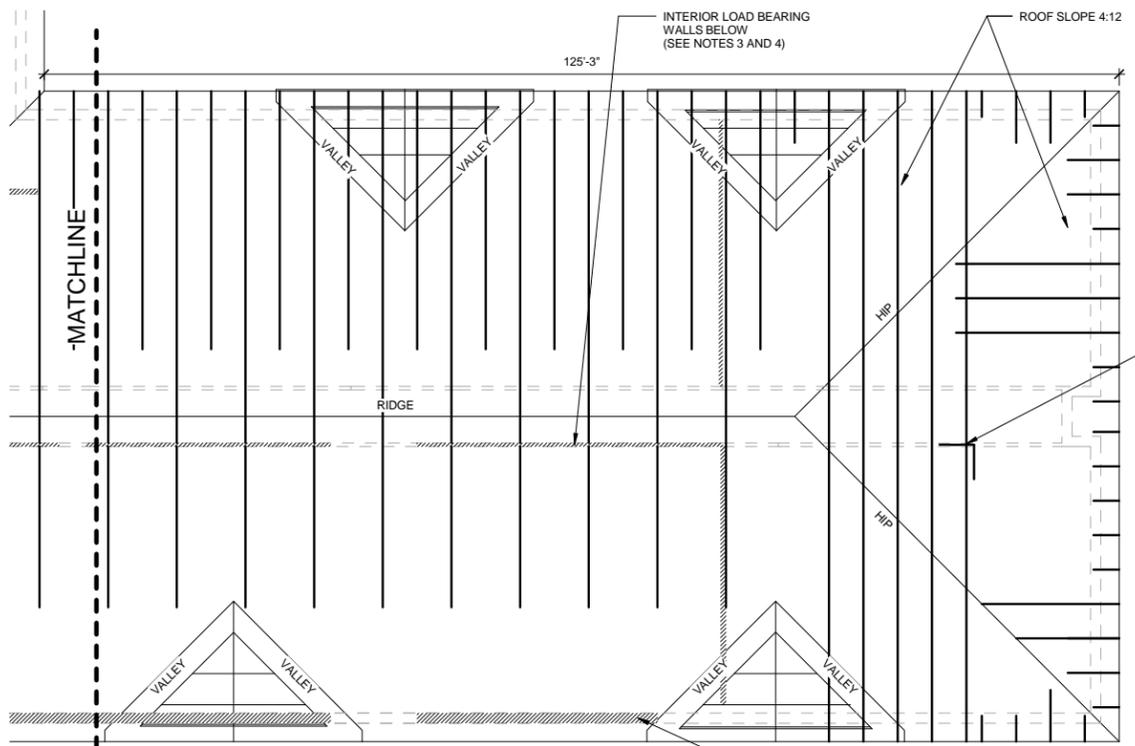

ROOF FRAMING PLAN - EAST
SCALE: 3/32" = 1'-0"

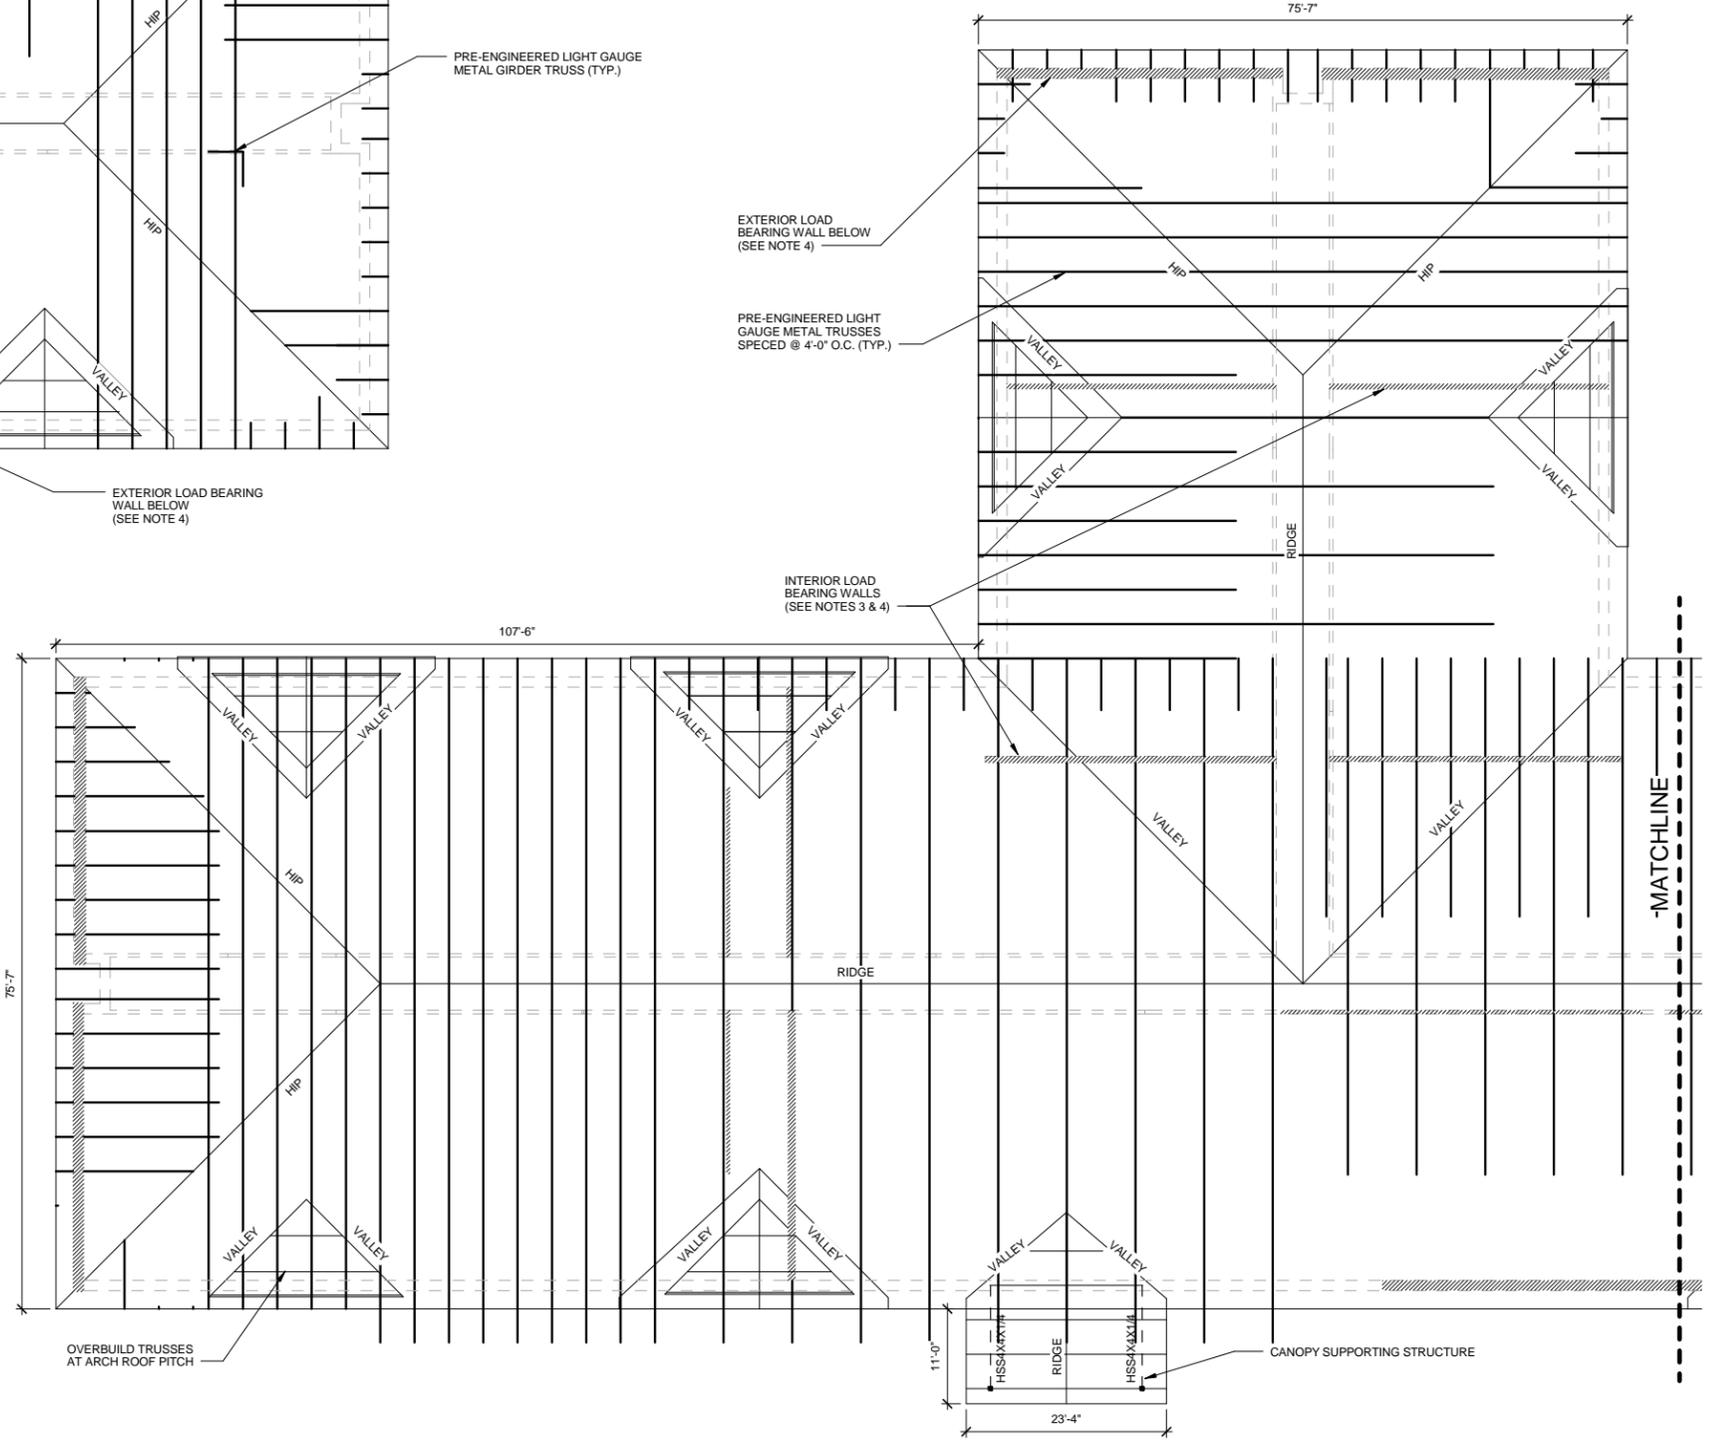

ROOF FRAMING PLAN - WEST
3/32" = 1'-0"



D
C
B
A

ABBREVIATIONS

SYMBOLS

GENERAL NOTES:

A		KW	KILOWATT
A/C	AIR CONDITION (-ING, -ER, -ED)	KWH	KILOWATT-HOUR
ABS	ABSOLUTE		
AC UNIT	AIR CONDITIONING UNIT	L	LOUVER
ACH	AIR CHANGES PER HOUR	LAT	LEAVING AIR TEMPERATURE
ADA	AMERICANS WITH DISABILITIES ACT	LB	POUNDS
ADP	APPARATUS DEW POINT	LF	LINEAR FEET
AFF	ABOVE FINISHED FLOOR	LG	LENGTH
AHU	AIR HANDLING UNIT	LHG	HEAT GAIN, LATENT
ALT	ALTITUDE	LMTD	LEAST MEAN TEMPERATURE DIFFERENCE
AMB	AMBIENT	LPS	LOW PRESSURE STEAM
APPROX	APPROXIMATE	LWT	LEAVING WATER TEMPERATURE
AS	AIR SEPARATOR		
ATM	ATMOSPHERE	M	MAXIMUM
AUX	AUXILIARY	MAX	1000 * BRITISH THERMAL UNIT
AVG	AVERAGE	MBH	MINUTE
		MIN	MINUTE
B	BOILER	MIN	MINIMUM
BBD	BOILER BLOWDOWN	MPS	MEDIUM PRESSURE STEAM
BF	BOILER FEED SYSTEM		
BHP	BRAKE HORSEPOWER	N	NOT APPLICABLE
BLDG	BUILDING	N/A	NOT APPLICABLE
BOD	BOTTOM OF DUCT	NC	NOISE CRITERIA
BOP	BOTTOM OF PIPE	NC	NORMALLY CLOSED
BP	BOILING POINT	NC	NOT IN CONTRACT
BP	BOILER PUMP	NO	NORMALLY OPEN
BT	BUFFER TANK	NO / #	NUMBER
BTU	BRITISH THERMAL UNIT	NTS	NOT TO SCALE
		O	OUTSIDE AIR
CFM	FLOW, CUBIC FEET PER MINUTE	OA	OUTSIDE AIR
CH	CHILLER	OAT	OUTSIDE AIR TEMPERATURE
CHWR	CHILLED WATER, SUPPLY	OZ	OUNCE
CHWR	CHILLED WATER, RETURN		
CLG LOAD	COOLING LOAD	P	PRIMARY CHILLED WATER PUMP
CMRP	COMPRESSOR	PCHWP	PRIMARY CHILLED WATER PUMP
CO	CARBON MONOXIDE	PCWP	PRIMARY CONDENSER WATER PUMP
CO2	CARBON DIOXIDE	PH	PHASE, ELECTRICAL
COEF	COEFFICIENT	PHWP	PRIMARY HOT WATER PUMP
COND	CONDENS(-ER, -ING, -ATION)	PPM	PARTS PER MILLION
CRP	CONDENSATE RETURN PUMP	PRESS	PRESSURE
CT	COOLING TOWER	PRV	PRESSURE REDUCING VALVE
CT	COOLING TOWER	PSF	POUNDS PER SQUARE FOOT
CU FT	CUBIC FEET	PSI	POUNDS PER SQUARE INCH
CU IN	CUBIC INCH	PSIA	PSI, ABSOLUTE
CV	COEFFICIENT, VALVE FLOW		
CWR	CONDENSER WATER, RETURN	R	THERMAL RESISTANCE
CWS	CONDENSER WATER, SUPPLY	RA	RETURN AIR
		RAT	RETURN AIR TEMPERATURE
D	DAMPER	REFR	REFRIGERANT
DB	DRY BULB TEMPERATURE	RG	RETURN AIR GRILLE
DBA	DECIBEL	RH	RELATIVE HUMIDITY
DEG	DEGREE	RPM	REVOLUTION PER MINUTE
DENS	DENSITY		
DIA	DIAMETER	S	ENTROPY
DIFF	DIFFERENCE	SA	SUPPLY AIR
DP	DIFFERENTIAL PRESSURE	SAT	SUPPLY AIR TEMPERATURE
DPT	DEW POINT TEMPERATURE	SC	SHADING COEFFICIENT
DX	DIRECT EXPANSION	SCFM	CFM, STANDARD CONDITIONS
		SCFS	CUBIC FEET PER SECOND, STANDARD
E	EXHAUST AIR	SCHWP	SECONDARY CHILLED WATER PUMP
EAT	ENTERING AIR TEMPERATURE	SD	SUCTION DIFFUSER
EER	ENERGY EFFICIENCY RATIO	SD	SUPPLY AIR DIFFUSER
EF	EXHAUST FAN	SF	SUPPLY FAN
EFF	EFFICIENCY	SF	SAFETY FACTOR
EG	EXHAUST AIR GRILLE	SG	SPECIFIC GRAVITY
ENT	ENTERING	SG	SUPPLY AIR GRILLE
ESP	EXTERNAL STATIC PRESSURE	SHG	SENSIBLE HEAT GAIN
ET	EXPANSION TANK	SHGC	SENSIBLE HEAT GAIN COEFFICIENT
EVAP	EVAPOR(-E, -ING, -ED, -OR)	SHR	SENSIBLE HEAT RATIO
EWT	ENTERING WATER TEMPERATURE	SHWP	SECONDARY HOT WATER PUMP
EXP	EXPANSION	SP	STATIC PRESSURE
		SP HT	SPECIFIC HEAT
F	TEMPERATURE FARENHEIT	SPEC	SPECIFICATION
FA	FREE AREA	SQ	SQUARE
FC	FLUID COOLER	STD	STANDARD
FC	FLEX CONNECTOR	SUCT	SUCTION
FPM	FEET PER MINUTE		
FPS	FEET PER SECOND	T	THERMOSTAT
FT	FEET	T STAT	TEST AND BALANCE
		TAB	TEMPERATURE
G		TG	TRANSFER AIR GRILLE
GAL	GALLONS	TON	TON OF REFRIGERATION (12,000 BTU)
GPH	FLOW, GALLONS PER HOUR	TXV	THERMOSTATIC EXPANSION VALVE
GPM	FLOW, GALLONS PER MINUTE		
GR	GRAINS	U	UNIT HEATER
GSHP	GROUND SOURCE HEAT PUMPE	UH	UNIT HEATER
		V	VALVE
H	ENTHALPY	VAV	VARIABLE AIR VOLUME
HG	MERCURY	VD	VOLUME DAMPER
HGT	HEIGHT	VENT	VENTILATION
HP	HEAT PUMP	VFD	VARIABLE FREQUENCY DRIVE
HPS	HIGH PRESSURE STEAM	VP	VELOCITY PRESSURE
HR	HOUR	VSD	VARIABLE SPEED DRIVE
HTHW	HIGH TEMPERATURE HOT WATER (>200 F)		
HVU	HEATING VENTILATING UNIT	W	WATT
HWR	HYDRONIC HOT WATER, RETURN	WB	WET BULB TEMPERATURE
HWS	HYDRONIC HOT WATER, SUPPLY	WC	WATER COLUMN
HX	HEAT EXCHANGER	WSHP	WATER SOURCE HEAT PUMP
HZ	FREQUENCY	WT	WEIGHT
		Y	
I		YD	YARD
I.E.	INVERT ELEVATION	YR	YEAR
IH	INFRARED HEATER		
IN	INCH		
K			
K	THERMAL CONDUCTIVITY		

PIPING		DUCTWORK	
	BALL VALVE		EXISTING DUCTWORK TO BE REMOVED
	BUTTERFLY VALVE		RECTANGULAR DUCT, FIRST DIMENSION IS SIDE SHOWN, DIMENSIONS ARE FREE AREA
	CHECK VALVE		45 DEG BRANCH TAKE-OFF
	GATE VALVE		DUCT TRANSITION
	AUTOMATIC FLOW CONTROL VALVE		MITERED ELBOW WITH TURNING VANES
	MANUAL CALIBRATED BALANCE VALVE		RECT. TO ROUND SPIN-IN FITTING W/DAMPER
	GLOBE VALVE		ROUND DUCT WITH DIAMETER SIZE DIMENSIONS ARE FREE AREA
	PRESSURE REDUCING VALVE		FLEXIBLE DUCT
	3-WAY CONTROL VALVE, DDC		SUPPLY /OUTDOOR AIR DUCT
	2-WAY CONTROL VALVE, DDC		RETURN AIR DUCT
	WYE STRAINER		EXHAUST AIR DUCT
	PRESSURE GAUGE		MANUAL VOLUME DAMPER
	THERMOSTAT		CONTROL/MOTORIZED DAMPER
			FIRE DAMPER
			THERMOSTAT
			EMERGENCY SHUTDOWN SWITCH
			TEMPERATURE SENSOR
			CARBON DIOXIDE SENSOR
			HUMIDITY SENSOR/HUMIDISTAT

GENERAL NOTES:	
A	"HVAC GENERAL NOTES" APPLY TO HVAC DRAWINGS. "PLAN NOTES" APPLY ONLY TO THE SHEETS ON WHICH THEY APPEAR. THE WORD "PROVIDE" MEANS "FURNISH AND INSTALL".
B	MECHANICAL DRAWINGS ARE DIAGRAMMATIC TO SHOW DESIGN INTENT. PROVIDE ANY ADDITIONAL DROPS, RISES, OR OFFSETS REQUIRED FOR A COMPLETE SYSTEM INSTALLATION. COORDINATE EXACT ROUTING OF MECHANICAL WORK WITH ALL OTHER TRADES AND OBSTRUCTIONS PRIOR TO BEGINNING WORK. COORDINATE EXACT LOCATIONS OF CEILING MOUNTED EQUIPMENT WITH LIGHTS, CEILING GRID, SPRINKLERS AND OTHER OBSTRUCTIONS. FIELD VERIFY EXISTING CONDITIONS IF APPLICABLE.
C	EQUIPMENT SHOWN ON THE DRAWINGS WAS OBTAINED FROM COMMON MANUFACTURERS OF HVAC EQUIPMENT AND ACCOUNTS FOR CLEARANCES AND OVERALL DIMENSIONS. SELECT AND PROVIDE HVAC EQUIPMENT THAT WILL FIT IN THE MECHANICAL SPACES PROVIDED, WHILE MAINTAINING MANUFACTURER'S MAINTENANCE CLEARANCES.
D	COORDINATE WITH ROOF CONTRACTOR WATERPROOFING OF ROOF PENETRATIONS AND SUPPORTS OF ROOF MOUNTED EQUIPMENT. PROVIDE FLASHING FOR ROOF CURBS AND DUCTWORK. PROVIDE BOOT FOR PIPES. PROVIDE PITCH POCKETS FOR REFRIGERANT LINES AND ROOF SUPPORTS THAT ARE NOT PIPES OR CURBS.
E	ROUTE HORIZONTAL DUCT AS HIGH AS POSSIBLE & AVOID INTERFERENCE WITH OTHER DUCTS, PIPING, LIGHTS, AND STRUCTURE. ROUTE HORIZONTAL PIPES PARALLEL TO WALLS AND ABOVE CEILINGS & AVOID INTERFERENCE AND CONTACT WITH DUCTS, OTHER PIPING, LIGHTS, AND STRUCTURE.
F	DO NOT INSTALL ANY EQUIPMENT OR FABRICATE ANY DUCTWORK PRIOR TO VERIFICATION OF ROUTING AND AVAILABILITY OF SPACE. COORDINATE SPACE REQUIREMENT WITH ALL OTHER TRADES.
G	PROVIDE SUPPORT FOR ALL DUCTWORK, PIPING, AND MECHANICAL EQUIPMENT. FIELD VERIFY ALL EQUIPMENT DIMENSIONS PRIOR TO FABRICATION OF EQUIPMENT SUPPORTS. WHERE INDICATED ON DRAWINGS, FLOOR MOUNTED EQUIPMENT SHALL HAVE HOUSEKEEPING PADS EXTENDING 4 INCHES OUTSIDE THE EQUIPMENT ENVELOPE AND MINIMUM 4 INCHES HIGH FOR EQUIPMENT WITHOUT DRAINS OR 6 INCHES HIGH FOR EQUIPMENT WITH DRAINS.
H	COORDINATE WITH GENERAL CONTRACTOR ACCESS PANEL LOCATIONS IN WALLS AND DRYWALL CEILINGS FOR ACCESS TO VALVES, DAMPERS, CONTROLS, EQUIPMENT REQUIRING SERVICING, AND DUCTWORK ACCESS PANELS. DUCTWORK ACCESS PANELS SHALL BE PROVIDED FOR FIRE DAMPERS, AND ACTUATORS IN THE DUCTWORK. PANEL SIZE SHALL BE AS REQUIRED PER THE SPECIFICATIONS.
I	DUCT DIMENSIONS NOTED ON THE DRAWINGS ARE INSIDE FREE AREA DIMENSIONS. DIFFUSER AND GRILLE NECK SIZES ARE THE SAME DIMENSIONS AS THE DUCTWORK RUN-OUT TO THE DEVICE, UNLESS OTHERWISE NOTED.
J	INSULATED FLEXIBLE DUCT SHALL BE USED TO CONNECT SUPPLY AIR DIFFUSERS, UNLESS SHOWN OTHERWISE. THE MAXIMUM LENGTH OF RUN FOR FLEXIBLE DUCT SHALL BE 5'-0" AND SHALL BE INSTALLED FREE OF KINKS AND ABRUPT TURNS. MAXIMUM UNSUPPORTED LENGTH SHALL BE 3'-0". FLEXIBLE DUCT TO DIFFUSER SHALL BE SAME SIZE AS DIFFUSER NECK, UNLESS OTHERWISE NOTED.
K	BRANCH TAPS SHALL USE EITHER A 45 DEGREE OR BELL ENTRY. BRANCH EXTRACTORS ARE NOT TO BE USED. PROVIDE TRANSITIONS AT ALL CHANGES IN DUCT SIZE, INCLUDING DIFFUSERS AND GRILLES, UNLESS SHOWN OR NOTED OTHERWISE. FLEXIBLE DUCT CONNECTIONS SHALL BE USED TO ISOLATE ALL FAN-POWERED EQUIPMENT.
L	SUPPLY, RETURN AND EXHAUST DIFFUSERS/GRILLES SHALL HAVE BALANCE DAMPERS IN THE DUCT, UNLESS DAMPERS ARE NOTED IN THE AIR DEVICE SCHEDULE. LOCATE BALANCE DAMPERS AS NEAR AS POSSIBLE TO DUCT BRANCH TAKEOFF WHILE MINIMIZING ACCESS DIFFICULTIES. DAMPERS TO AIR DEVICES SHALL BE LOCKING QUADRANT TYPE, WITH A STAND-OFF FOR DUCTS WITH INSULATION.
M	REFER TO ARCHITECTURAL DRAWINGS AND PLANS FOR EXACT LOCATIONS OF DIFFUSERS, LINEAR SLOT DIFFUSERS, REGISTERS, GRILLES AND LOUVERS.
N	EXPOSED DUCT IN OCCUPIED SPACES TO BE PAINTED, COLOR TO BE SELECTED BY ARCHITECT.
O	RUN-OUT PIPES TO COILS 3/4" UNLESS OTHERWISE NOTED. NOTED PIPE SIZES THE SAME IN DIRECTION OF DECREASING FLOW TILL CHANGED BY ANOTHER PIPE SIZE NOTE.
P	USE FITTINGS FOR ALL PIPE CHANGES IN DIRECTION AND SIZE AND BRANCH CONNECTIONS. EXTRUDED TEE CONNECTIONS AND BUSHINGS SHALL NOT BE USED. PROVIDE ISOLATION VALVES ON ALL BRANCHES OFF MAIN PIPE.
Q	FOR HYDRONIC PIPES, INSTALL MANUAL AIR VENTS AT HIGH POINTS AND DRAIN VALVES AT THE LOW POINTS OF THE PIPE. FOR EQUIPMENT WITH DRAINS, PROVIDE DRAIN PIPE FROM THE EQUIPMENT TO A FLOOR DRAIN OR MOP SINK.

DESIGNER NOTES:	
1	PLEASE NOTE THAT THE MECHANICAL DESIGN PROVIDED HEREIN IS FOR INFORMATION ONLY. THE MECHANICAL DRAWINGS ARE NOT MANDATORY AND ARE PROVIDED TO GIVE DESIGNERS SUGGESTIONS ON HOW A TRAINING SUPPORT CENTER(TSC) COULD BE MECHANICALLY DESIGNED.
2	THE MECHANICAL DESIGNER WILL BE ENTIRELY RESPONSIBLE FOR SELECTING THE APPROPRIATE EQUIPMENT AND SYSTEMS FOR ANY SPECIFIC SITE DESIGN.
3	THE DESIGN PROVIDED HEREIN IS BASED UPON A FICTIONAL SITE LOCATED IN FORT BRAGG, NORTH CAROLINA.
4	THE DESIGNER OF RECORD SHALL VERIFY VENTILATION REQUIREMENTS MEET ASHRAE 62.1 FOR EACH SPACE WITHIN THE BUILDING. OCCUPANCIES USED FOR VENTILATION CALCULATIONS SHOULD BE VERIFIED WITH THE CUSTOMER AS SITE SPECIFIC REQUIREMENTS MAY VARY FROM THOSE USED IN THIS STANDARD DESIGN.
5	THE DESIGN FOR WAREHOUSE SPACES AND APPARATUS BAYS SHALL CONSIST OF INFRARED HEATERS AS REQUIRED TO MAINTAIN THE REQUIRED SPACE TEMPERATURE IN THE WINTER AND EXHAUST FANS AND LOUVERS FOR PROVIDING NATURAL VENTILATION COOLING IN THE SUMMER.

ATFP NOTES:	
1	EXTERIOR EQUIPMENT: LOCATE A MINIMUM OF 33 FEET FROM BUILDING. IF CONDITIONS REQUIRE THAT EQUIPMENT BE LOCATED LESS THAN 33 FEET FROM THE BUILDING, THEN THE EQUIPMENT SHALL BE LOCATED AND ARRANGED SO THAT AN OBJECT OVER SIX INCHES INHEIGHT WOULD BE READILY OBSERVED BY BUILDING OCCUPANTS.
2	AIR INTAKES: LOCATE A MINIMUM OF 10 FEET ABOVE THE GROUND.
3	EMERGENCY SHUTOFF SWITCH: PROVIDE A SHUTOFF SWITCH IN THE HVAC CONTROL SYSTEM THAT CAN IMMEDIATELY SHUT DOWN THE AIR DISTRIBUTION SYSTEMS THROUGHOUT THE BUILDING. LOCATE THE SWITCH TO BE EASILY ACCESSIBLE BY BUILDING OCCUPANTS.
4	DAMPERS: FIT OUTSIDE AIR INTAKES, RELIEF, AND EXHAUST OPENINGS WITH LOW LEAKAGE DAMPERS THAT AUTOMATICALLY CLOSE WHEN THE AIR SHUTOFF SWITCH IS ACTIVATED. THE LOW LEAKAGE DAMPERS SHALL HAVE A LEAKAGE RATE OF LESS THAN 3 CFM/SQUARE FOOT AT A PRESSURE DIFFERENTIAL OF 3.0 INCHES STATIC PRESSURE.
5	OVERHEAD EQUIPMENT WEIGHING OVER 30 POUNDS: DESIGN ALL EQUIPMENT MOUNTINGS TO RESIST A FORCE 0.5 TIMES THE WEIGHT OF THE EQUIPMENT IN ANY HORIZONTAL DIRECTION AND 1.5 TIMES THE EQUIPMENT WEIGHT IN THE DOWNWARD DIRECTION. THIS REQUIREMENT IS SEPARATE FROM OTHER MOUNTING REQUIREMENTS FOR SEISMIC OR OTHER FORCES.

US Army Corps of Engineers
HUNTSVILLE CENTER

DATE	JUNE 2014	SOLICITATION NO.		CONTRACT NO.		CATEGORY CODE		FILE NAME	
DESIGN BY:	JOS	DRAWN BY:	ESG	ISSUED BY:	ESG	DATE:	01/20/14	TIME:	4:01:35 PM
DATE:	JUNE 2014	CONTRACT NO.:		CATEGORY CODE:	65% DESIGN PACKAGE	FILE NAME:		SIZE:	D 27 x 34"

U.S. ARMY CORPS OF ENGINEERS
ENGINEERING AND SUPPORT CENTER - HUNTSVILLE

4820 UNIVERSITY SQ
HUNTSVILLE, AL 35816

CDC 0-5
STANDARD DESIGN, MEDIUM
0 WEEKS - 5 YEARS OLD

HVAC LEGEND

PLATE
REFERENCE
NUMBER
M-001

SHEET 55 OF 89

WATER SOURCE HEAT PUMP SCHEDULE

Table with columns: MARK, SERVICE, ZONE O.A. (CFM), SUPPLY FAN DATA (AIRFLOW, EXT. SP, SPEED, MOTOR), COIL PERFORMANCE (COOLING) (TOTAL CAPACITY, SENSIBLE CAPACITY, E.A.T. DB/WB, L.A.T. DB/WB, E.W.T./L.W.T., FLOW RATE, EER), COIL PERFORMANCE (HEATING) (CAPACITY, E.A.T. DB, L.A.T. DB, E.W.T./L.W.T., FLOW RATE, COP), WATER PRESSURE DROP (FT.), REFR., ELECTRICAL V/HZ/Φ, NOTES.

NOTES:
1. PROVIDE PREMIUM EFFICIENCY MOTORS FOR THE COMPRESSORS.

WATER TO WATER HEAT PUMP SCHEDULE

Table with columns: MARK, LOCATION, TYPE, CAPACITY, CONDENSER WATER (E.W.T., L.W.T., FLOW RATE, MAX PD), LOAD WATER (E.W.T., L.W.T., FLOW RATE, MAX PD), FOULING FACTOR, NOTES.

AIR HANDLING UNIT SCHEDULE

Table with columns: MARK, LOCATION, SUPPLY FAN DATA (AIRFLOW, MIN. O.A., EXT. S.P., SPEED, FAN TYPE, BLADE TYPE, DRIVE, VOLUME TYPE, MOTOR), COOLING COIL DATA (TOTAL CAPACITY, SENSIBLE CAPACITY, FACE VELOCITY, EAT DB/WB, LAT DB/WB, EWT/LWT, FLOW RATE), PRE-HEAT COIL DATA (TOTAL CAPACITY, EAT/LAT, EWT/LWT, FLOW RATE), RE-HEAT COIL DATA (TOTAL CAPACITY, EAT/LAT, EWT/LWT, FLOW RATE), DIMENSIONS (LxWxH, WEIGHT), NOTES.

NOTES:
1. PROVIDE VIBRATION ISOLATION ROOF CURB.
2. PROVIDE LONWORKS CONTROLLER/INTERFACE.
3. PROVIDE OUTSIDE AIR MEASURING STATION.
4. PROVIDE 2 SETS OF 2" PLEATED 25% EFFICIENT (MERV 6) PRE-FILTERS.
5. PROVIDE 2 SETS OF 12" 80% EFFICIENT (MERV 13) FINAL FILTERS.
6. PROVIDE UNIT WITH ECONOMIZER. SEE CONTROL DRAWINGS FOR OPERATION OF ECONOMIZER.

ENERGY RECOVERY VENTILATING UNIT SCHEDULE

Table with columns: MARK, LOCATION, OUTDOOR AIR FAN DATA (AIRFLOW, EXT. S.P., SPEED, VOLUME TYPE, MOTOR), EXHAUST FAN DATA (AIRFLOW, EXT. SP, SPEED, VOLUME TYPE, MOTOR), ENERGY RECOVERY DATA - SUMMER (OUTDOOR AIR: EAT, LAT; EXHAUST: EAT, LAT), ENERGY RECOVERY DATA - WINTER (OUTDOOR AIR: EAT, LAT; EXHAUST: EAT, LAT), WHEEL (O.A. WHEEL EFF. (%), E.A. WHEEL EFF. (%)), ELECTRICAL (V/HZ/Φ), DIMENSIONS (LxWxH, WEIGHT), NOTES.

NOTES:
1. PROVIDE VIBRATION ISOLATION ROOF CURB.
2. PROVIDE LONWORKS CONTROLLER/INTERFACE.
3. PROVIDE OUTSIDE AIR MEASURING STATION.
4. PROVIDE 2 SETS OF 2" PLEATED 25% EFFICIENT (MERV 6) PRE-FILTERS.
5. PROVIDE 2 SETS OF 12" 80% EFFICIENT (MERV 13) FINAL FILTERS.



Vertical table with columns: SYMBOL, DESCRIPTION, DATE, BY.

Vertical table with columns: DATE, DESIGN BY, DRAWN BY, CHECKED BY, SUBMIT BY, PLOT DATE, PLOT SCALE, FILE NAME, SOLICITATION NO., CONTRACT NO., CATEGORY CODE.

U.S. ARMY CORPS OF ENGINEERS
ENGINEERING AND SUPPORT CENTER - HUNTSVILLE
4820 UNIVERSITY SQ
HUNTSVILLE, AL 35816

CDC 0-5
STANDARD DESIGN, MEDIUM
0 WEEKS - 5 YEARS OLD
HVAC SCHEDULES
PLATE REFERENCE NUMBER
M-602
SHEET 70 OF 89

