



EXTENSION ARM DETAILS
NO SCALE

MINIMUM OUTSIDE DIMENSIONS (MM MIN)	
USE	
Corner, End & Pull Posts	100 O.D.
Line Posts	73 O.D.
Top, Bottom & Brace Rails	42 O.D.


CHAIN-LINK SECURITY FENCE DETAIL
NO SCALE

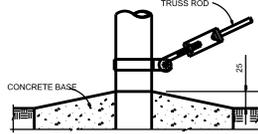


TRUSS ROD AND BAND



BRACE RAIL CLAMP DETAILS



END OR GATE POST DETAIL



TENSION BAND DETAIL




TOP OR BRACE RAIL ATTACHMENT




LINE POST ATTACHMENTS



9 GAUGE STEEL TIE WIRE 381 OC MAX 100 FROM TOP AND BOTTOM

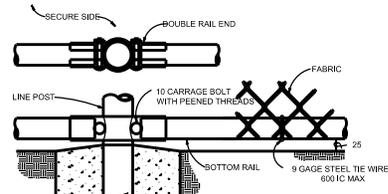

BOTTOM RAIL DETAILS
NO SCALE

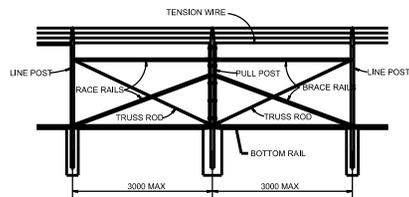

BRACE PANEL DETAIL
NO SCALE

PROVIDE BRACE PANEL 100 METERS OC MAX

FASTENING DETAILS
NO SCALE

NOTE:

1. THE FENCE SHALL HAVE FABRIC SCREEN ATTACHED TO THE FENCE FABRIC. THE FABRIC SCREEN SHALL HAVE A FINISH HEIGHT OF 2400 AND BE CONTINUOUS ALONG THE FENCE LINE INCLUDING 43 METERS OF EXISTING FENCE.
2. GATES SHALL BE FITTED WITH FABRIC 2400 BY WIDTH OF THE GATE.
3. FABRIC SCREEN SHALL BE MADE FROM UV RESISTANT BLACK WOVEN POLYPROPYLENE. THE FABRIC SHALL PROVIDE OBSCURATION OF AT LEAST 90%. ALL EDGES SHALL HAVE REINFORCED HEMS AND BRASS GROMMETS. GROMMETS SHALL BE LOCATED AT ALL CORNERS AND AT A MAXIMUM SPACING OF 1000 OC.
4. FABRIC SCREEN SHALL BE CONNECTED TO THE FENCE FABRIC WITH THE SAME WIRE TIES USED ON THE FENCE.

UNLESS OTHERWISE NOTED, LINEAR DIMENSIONS SHOWN ARE IN MILLIMETERS.